



# TS-2/TS-3 Radiator Traps

For Pressures to 65 psig (4.5 bar)...Capacities to 1,600 lb/hr (726 kg)

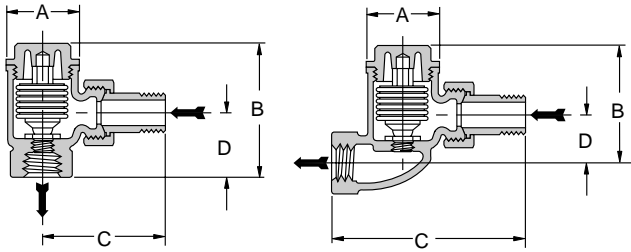

TS-2 Trap Angle Type

TS-2 Trap Straight Type

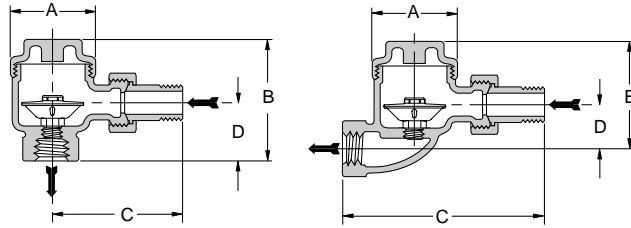

TS-3 Trap Angle Type

TS-3 Trap Straight Type




Armstrong Series TS radiator traps are offered in both angle and straight patterns. The TS-2 has a balanced pressure thermostatic element with a high quality multiple-convolution bellows. It's ideal for draining equipment such as steam radiators and convectors, small heat exchangers, unit heaters and steam air vents. The TS-2 comes with a strong, cast bronze body and a stainless seat. The valve and seat are renewable in-line.

The TS-3 is a heavy duty, wafer type trap for the drainage of all types of steam radiators and convectors. Its wafer design is well suited to systems prone to water hammer, which may damage conventional bellows type units. The TS-3 is repairable in-line and has an all-stainless steel wafer element.

### Materials

Cap:	Bronze, ASTM B62
Body:	Bronze, ASTM B62
Union nipple:	Brass, ASTM B584
Valve:	
Model TS-2:	Brass
Model TS-3:	Stainless steel
Valve seat:	Stainless steel
Element:	
Model TS-2:	Phosphor-bronze bellows
Model TS-3:	T-316 SS Wafer w/T-304 SS Housing

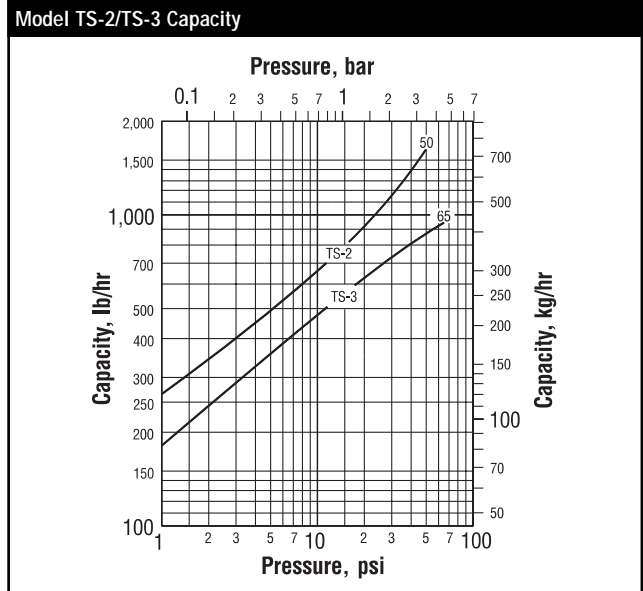

For a fully detailed certified drawing, refer to:

TS-2 CDY #1045

TS-3 CDY #1046

TS Series Radiator Traps																				
Model	TS-2								TS-3											
	Angle				Straight				Angle					Straight						
Type	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
Pipe Connections	1/2	15	3/4	20	1/2	15	3/4	20	1/2	15	3/4	20	1	25	1/2	15	3/4	20	1	25
"A" (Diameter)	1-5/8	41.3	1-5/8	41.3	1-5/8	41.3	1-5/8	41.3	2	50.8	2	50.8	2-3/8	60.3	2	50.8	2	50.8	2-3/8	60.3
"B" (Height)	2-15/16	74.6	3	76.2	2-11/16	68.3	2-7/8	73	2-7/8	73.0	3-5/8	92.1	3-7/8	98.4	2-5/8	66.7	3-3/8	85.7	3-1/2	88.9
"C"	2-9/16	65.1	2-7/8	73	4	101.6	4-1/2	114.3	3-1/8	79.4	3-1/2	88.9	4-1/8	105	4-7/8	124	5-1/4	133	6-1/2	165
"D"	1-3/8	34.9	1-5/8	41.3	1-1/8	28.6	1-5/16	33.3	1-3/8	34.9	1-5/8	41.3	2	50.8	1-1/8	28.6	1-3/8	34.9	1-5/8	41.3
Weight lb (kg)	1-1/2 (0.7)		1-3/4 (0.8)		1-1/2 (0.7)		2 (0.9)		1-1/2 (0.7)		2 (0.9)		2-1/2 (1.1)		1-1/2 (0.7)		2-1/4 (1)		3 (1.4)	

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.