

# Water Temperature Control - Single Point of Use



## Digital

### Sense™ Model DMV3-Individual Bath


Concealed digital mixing valve with surface mount control panel for individual bath fill and +/-2°F (+/-1°C) temperature control.

### Operational Specifications

- Programmable timed flow
- No touch on/off flow control
- No touch temperature adjustment
- Programmable minimum/maximum temperature access limits
- Programmable service flush
- Programmable thermal disinfection mode
- Data logging capabilities



For a submittal drawing, refer to CDLW #1149.

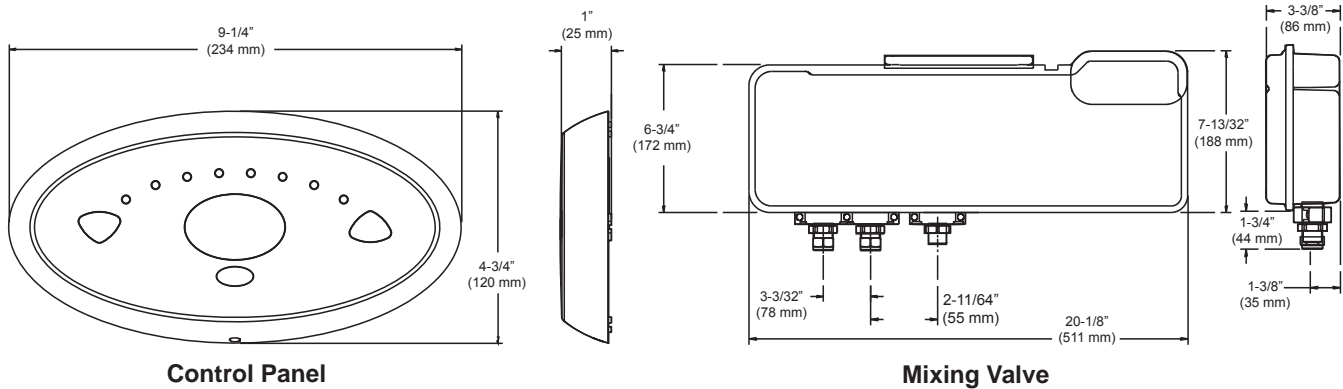

Sense™ Digital Mixing Valves												
Model	Pressure Drop (psi)										Min. Flow	C <sub>v</sub>
	5	10	15	20	25	30	35	40	45	50		
DMV1	3	4	5	6	6	7	7	8	9	9	1	1.2
DMV2												
DMV3	6	8	10	11	12	14	15	16	17	18	1.6	2.5
DMV23												

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.



# Water Temperature Control - Single Point of Use

## Digital

### Sense™ Model DMV3-Individual Bath Technical Specifications

#### Connections

- Inlet and outlet connections: 3/4" NPT

#### Materials

- Control panel cover: Chrome ABS
- Mixing unit enclosure: PC/ABS
- Integral components: DZR brass stainless steel and engineering plastic

#### Temperatures

- Factory pre-set:  
Min 86°F (30°C), Max 106°F (41°C),  
Default 104°F (40°C)
- Programmable range:  
Min 86°F - 117°F (30°C - 47°C),  
Max 91°F - 122°F (33°C - 50°C),  
Default 86°F - 122°F (30°C - 50°C)  
Full cold can also be selected
- Minimum blend temperature differential from hot supply:  
5°F (2°C)
- Optimum thermostatic control range:  
86°F - 122°F (30°C - 50°C)
- Inlet Cold water range (recommended):  
34°F - 68°F (1°C - 20°C)
- Inlet Hot water range (recommended):  
122°F - 149°F (50°C - 65°C )  
185°F (85°C) during disinfection

#### Performance

- Thermal shutdown upon inlet supply failure
- +/- 2°F (+/- 1°C) delivery temperature stability
- Minimum flow rate at recommended supply conditions:  
1.6 GPM (6 LPM) at <72 psi maintained pressure  
2 GPM (8 LPM) at >72 psi maintained pressure.

#### Thermal Disinfection

- Factory Settings  
Min. Temperature: 140°F (60°C)  
Min. Time: 5 minutes
- Programmable Range  
Min. Temperature: 140 - 185°F (60 - 85°C)  
Min. Time: 0 - 50 minutes  
Reduced water flow during disinfection can be selected.

#### Environment

- Ambient temperature: 34°F - 104°F (1°C - 40°C)
- Maximum relative humidity: 95% non-condensing

#### Pressures

- Maximum static pressure: 145 psi (10 bar)
- Maximum inlet supply pressure differential: 3:1 (equal inlet pressures recommended)

#### IP Rating

- Control panel: IP45
- Overall valve enclosure: IP24
- Electronics compartment: IP45
- PSU: IP45

#### Electrical

- Supply Voltage: 120V 50-60Hz
- Maximum load: 20W at 12V DC
- Control panel cable length: 10 ft. (3m) supplied
- Maximum distance 20 ft. (6m)

#### Times - Factory settings

- Flow time: 300 seconds
- Service flush cycle: 2 minutes
- Service flush waiting period: 12 hours

#### Programmable range


- Flow time: 5 seconds - 60 minutes
- Service flush cycle: 1 minute - 59 minutes
- Service flush waiting period: 1 hour - 983 hours

#### Operation

- Temperature selector: Full no-touch temperature control
- Flow control: No-touch on/off - timed flow

#### Approvals

- ASSE 1016, CSA, UL

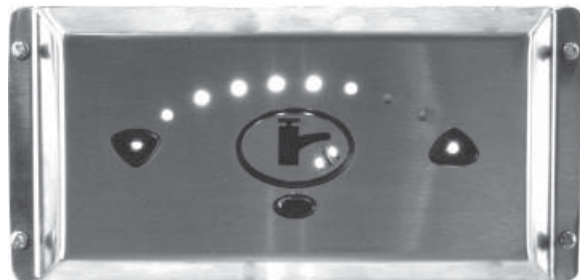

Optional Stainless Steel Control Panel Cover

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.