DIMENSIONS & DATA CERTIFIED FOR:

Representative: Order:

Customer: Order:

Project:

Requirements:

By: Date:

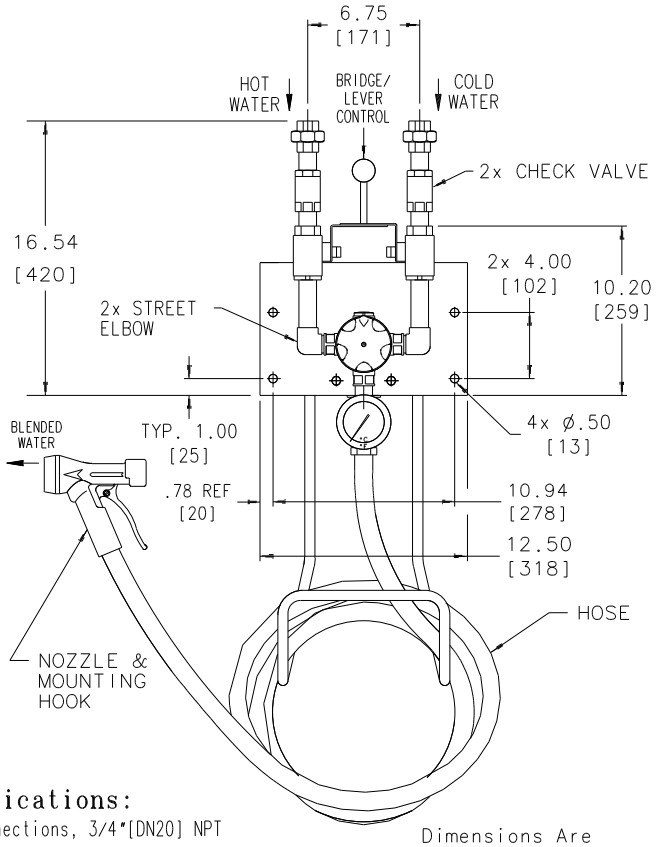

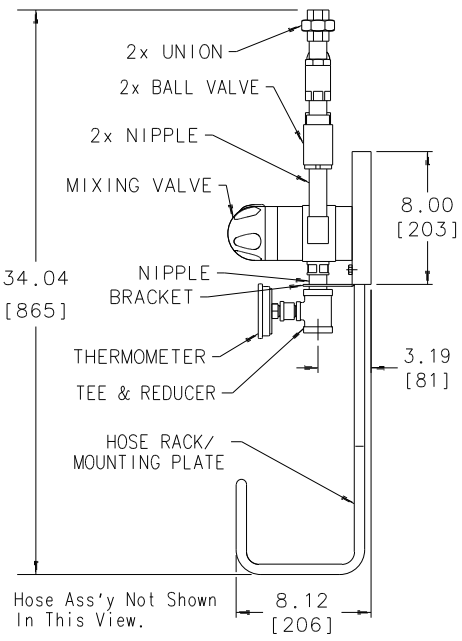

Dimensions Are In Inches [mm]

Specifications:

1. Connections, 3/4"[DN20] NPT
2. Operating Pressure-
   150 psi[10 bar] Max.
   10 psi[.7 bar] Min.
3. Maximum Pressure Loss Ratio 10:1
4. Inlet Check Valves Included
5. Weight, Unit; 49 lbs [22 kgs] W/ 25' Hose
   60 lbs [27 kgs] W/ 50' Hose

** FLOW RATES, MIXING VALVE:*

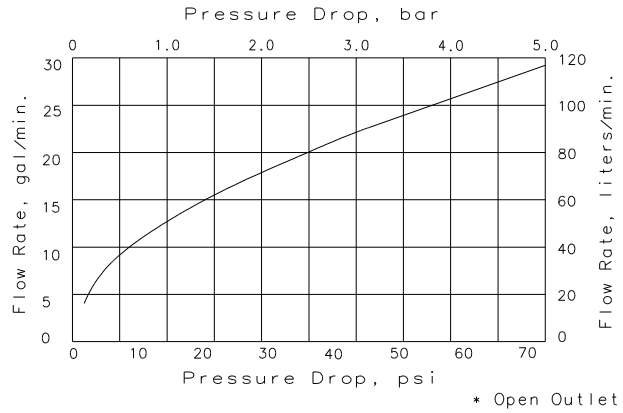

* Open Outlet

LIST OF MATERIALS	
NAME OF PART	MATERIAL
VALVE, MIXING	ASTM B16 BRASS W/ CHROME PLATING
CHECK VALVE	ASTM B61 BRONZE (NICKEL PLATE)
BALL VALVE	
STREET ELBOW	ASTM B16 BRASS(NICKEL PLATE)
NIPPLE	ASTM A312 T304 SS
TEE & REDUCER	ASTM B62 BRASS(NICKEL PLATE)
HOSE RACK/MOUNTING PLATE	ASTM A167 T304 SS
BRIDGE/LEVER CONTROL	ASTM A167 T304 SS & PHENOLIC
THERMOMETER, 3"Ø 0°-250°F	18-8 SS
HOSE (25' Or 50' Available)	YELLOW POLY WRAP, 500 psi at 180°F
NOZZLE	RUBBER COVERED NOZZLE
MOUNTING HOOK, BRACKET & NOZZLE	ASTM A167 T304 SS

Armstrong

ARMSTRONG HOT WATER GROUP
221 Armstrong Boulevard
Three Rivers, MI 49093
1-888-HOT HOSE(1-888-468-4673) Fax 1-269-279-3130
Posted on www.armstronginternational.com

H/C WATER HOSE STATION 3033S PREMIUM

Date 12/8/98 | Rev. F

Drawing No. CDLW 1018